
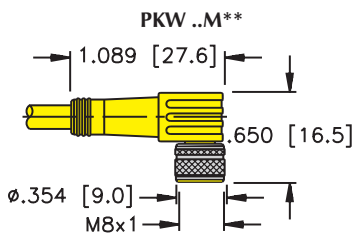


## 3-Wire picofast® Cordsets, Threaded Coupling Nut

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 4 A



Housing Style	Part Number	Cable	Features	Pinout
 <p>PKW ..M**</p>	PKW 3M-*	AWM PVC Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF50642-*M <sup>†</sup>	<i>flexlife</i> ®	
	PKW 3M-*/S90	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50587-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	
	PKW 3M-*/S90/S101	AWM PUR Black 3x24 AWG 105°C 4.5 mm OD Cable #RF51166-*M <sup>†</sup>	<i>Cut/Abrasion Immune, flexlife-10, High Flex - Over 10 Million Cycles</i>	
	PKW 3M-*M/S90/S618	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50601-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>	
	PKW 3M-*/S1587	AWM TPE Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF51271-*M <sup>†</sup>	<i>weldlife</i> ®, <i>Weld Flash Immune</i>	
	PKW 3M-*M/S760	AWM PVC Black 3x24 AWG 4.4 mm OD Cable #RF50585-M <sup>†</sup>	<i>flexlife</i>	
	PKW 3M-*M/S90/S1084	AWM PUR Black 2x24 AWG 105°C 4.4 mm OD Cable #RF51197-*M <sup>†</sup>	<i>Cut/Abrasion Immune, Shielded</i>	
	PKW 3M-*/XOR	PVC Orange 3x24 AWG 80°C, 250° C short term 4.4 mm OD Cable #RF04449-*M <sup>†</sup>	<i>Weld Flash Immune, High Temp. Immune</i>	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.

\*\* Standard coupling material is nickel plated brass.

† See Section N for *reelfast*® cable information.

3-Wire *pico fast*® Cordsets, Threaded Coupling Nut

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 4 A



Housing Style	Part Number	Cable	Features	Pinout
<p>PSG .. M**</p> <p>PSGV .. M**</p>	PSG 3M-*	AWM PVC Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF50642-*M†	<i>flexlife</i> ®	
	PSG 3M-*/S90	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50587-*M†	<i>Cut/Abrasion Immune</i>	
	PSG 3M-*/S90/S101	AWM PUR Black 3x24 AWG 105°C 4.5 mm OD Cable #RF51166-*M†	<i>Cut/Abrasion Immune, flexlife-10, High Flex - over 10 Million Cycles</i>	
	PSG 3M-*M/S90/S618	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50601-*M†	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>	
	PSG 3M-*M/S1587	AWM TPE Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF51271-*M†	<i>weldlife</i> ®, <i>Weld Flash Immune</i>	
	PSG 3M-*/S760	AWM PVC Black 3x24 AWG 105°C 4.5 mm OD Cable #RF50585-*M†	<i>flexlife</i>	
	PSG 3M-*M/S90/S1084	AWM PUR Black 2x24 AWG 105°C 4.4 mm OD Cable #RF51197-*M†	<i>Cut/Abrasion Immune, Shielded</i>	
	PSG 3M-*/XOR	PVC Orange 3x24 AWG 80°C, 250°C short term 4.4 mm OD Cable #RF04449-*M†	<i>Weld Flash Immune, High Temp Immune</i>	
<p>PSG 3F .. **</p>	PSG 3F-*	AWM PVC Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF50642-*M†	<i>Fixed coupling nut</i>	1. BN 3. BU 4. BK

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.

\*\* Standard coupling material is nickel plated brass.. "PSG..M"; "PSGV..M" indicates 316 stainless steel.