

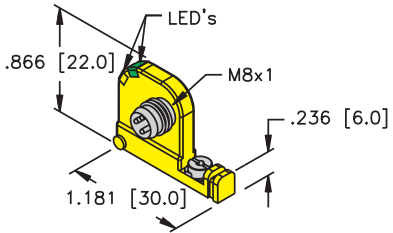
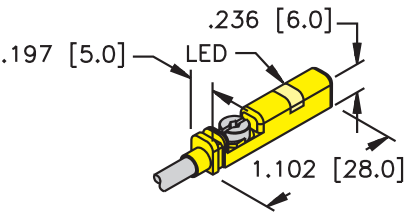
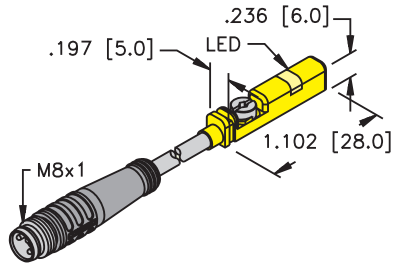


# Inductive Cylinder Position Sensors

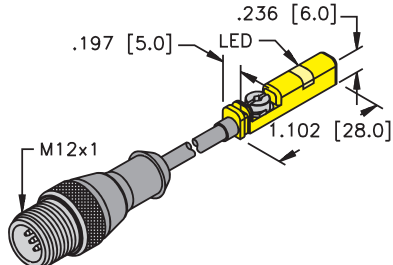

Housing Style	Part Number	ID Number	Features	Magnetic Actuation Strength (Gauss)	Output
<b>UNT - picofast® Quick Disconnect</b> 	BIM-UNT-AN6X2-V1131	S4685753		20-350	3-Wire DC NPN
	BIM-UNT-AP6X2-V1131	S4685727		20-350	3-Wire DC PNP
<b>UNT - Potted-In Cable</b> 	BIM-UNT-AN6X	S4685702		20-350	3-Wire DC NPN
	BIM-UNT-AP6X	S4685741		20-350	3-Wire DC PNP
	BIM-UNT-AG41X/S1139/S1160	S4685766	See Notes	20-350	2-Wire DC
	BIM-UNT-AY1X/S1139	S4685763	See Notes	20-350	2-Wire NAMUR
<b>UNT - picofast Quick Disconnect</b> 	BIM-UNT-AN6X-0.3-PSG 3S	S4685705		20-350	3-Wire DC NPN
	BIM-UNT-AP6X-0.3-PSG 3S	S4685722		20-350	3-Wire DC PNP
<b>UNT - eurofast® Quick Disconnect</b> 	BIM-UNT-AP6X-0.3M-RS 4T	SS46857260		20-350	3-Wire DC PNP
	BIM-UNT-AN6X-0.3M-RS 4T	S4685792		20-350	3-Wire DC NPN

**Notes:**

/S1139 = Wider travel more range.

/S1160 = Potted TPU cable for welding environments

**For detailed sensor specifications see Section M.  
Normally Closed versions available upon request, consult factory.**



Voltage	Switching Freq. (Hz)	Operating Current (mA) VAC/VDC	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cord, Cable Length /Jacket	Wiring Diagram #	Wiring Diagrams
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	PKG 3Z-*	1	<p><b>Diagram 1</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	PKG 3Z-*	2	<p><b>Diagram 2</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/PUR	3	<p><b>Diagram 3</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/PUR	4	<p><b>Diagram 4</b></p>
10-55 VDC	300	≤100	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/TPU	5	<p><b>Diagram 5</b></p>
8.2 VDC	1000	Remote	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/PVC	6	<p><b>Diagram 6</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/PUR	1	<p><b>Diagram 7</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	2M/PUR	2	<p><b>Diagram 8</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	RK 4T-*	7	<p><b>Diagram 7</b></p>
10-30 VDC	1000	≤200	-25 to +70	IP 67	PA 12	PA 12	N/A	YE	RK 4T-*	8	<p><b>Diagram 8</b></p>

For material descriptions see page M36.